





Key Features

Multiple designs available

Intergrated playout system easy control


Automatic on/off system in time schedule


360° viewing

✓ Noise-free

Dimension: 320*360*4-SIDES Pixel Pitch: 2.5mm

Applications: Conference Room, Traffic Command Center, Shopping Mall, Schools, Concourse Video Walls, Monitoring Rooms, etc.

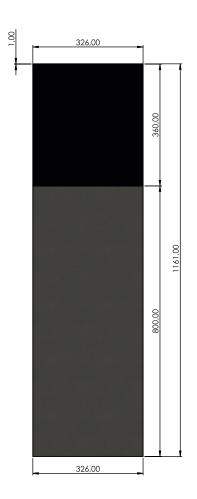

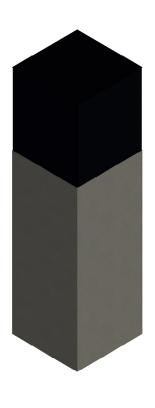

| Item Number | LED-CUBE |
|------------------------|----------------------------|
| Pixel Pitch | 2.5mm |
| Pixel Density | 160,000 pixels/m2 |
| LED Arrangement | SMD2121 |
| Module Resolution | 128x144pixels |
| Module Dimension | 320x360mm |
| Panel Resolution | 512x144pixels |
| Panel Dimension | 960x360x39mm |
| Panel Weight | 18kg (4 sides) |
| Brightness Level | 1200cd/m2 |
| Max Power Consumption | 555W/m2 |
| Avg Power Consumption | 185W/m2 |
| Viewing Angle | 160°/160° |
| Operating Power Source | 100-240V AC 50-60Hz |
| Operating Temperature | -10°C + 50°C |
| Refresh Rate | >3840Hz /1920Hz |
| Protecting Rating | IP30 |
| Certificate | CE, ETL, FCC, CCC, CB, CRM |